

**\*This product is not for sale in the USA.**

## Key Features

- Network real-time accuracy mass fever-scanning
- Dual Vision (thermal and visual) system for easy screening
- Pre-definable values for abnormal temperatures
- Grayscale image using red to indicate high temperatures.
- Adjustable display palette temperature range
- Ability to "spot-check" with mouse for accurate crosshair temperature readings
- Customizable high-temperature alarm
- Log file records alarm data
- Turn-key system contains thermal camera head, display software and data acquisition/recording system.

## System Overview

The LCG300 System is designed for mass screening of public areas and is used to find individuals with elevated body temperatures. As a group of people walk pass the camera head, thermal and visual images are displayed on the nearby monitor. Body temperatures above a predefined value are displayed. Those individuals can then be diverted and further assessed by professionals.

Network is a significant feature for LCG300. Remote, real-time and high accuracy let mass monitoring/scanning much easy and flexible. The dual sensors, visual/thermal, image comparison allows for easier/faster screening—the operator and control center can screen and identify at the same time.

The LCG300 is capable of evaluating hundreds of people per minute—pedestrian flow is not restricted. The LCG300 is ideal for mass temperature screening in public transport situations: airports, railway/subway stations, seaports, and other public facilities.

## Specifications

### Thermal Camera

<b>Lens</b>	19mm (FOV: 24° x 18°)
<b>Focal Plane Array</b>	Micro-bolometer (Amorphous silicon or vanadium oxide)
<b>Image Frequency</b>	7.5 Hz (NTSC) or 8.3 Hz (PAL)*
<b>Spectral Range</b>	8 -- 14 $\mu$ m
<b>Number of Pixels</b>	324 x 256
<b>NETD</b>	0.05°C @ 30°C
<b>Video output</b>	Network digital

### Visual Camera

<b>Image Sensor</b>	1/3" 1.3 Million Pixel CMOS Sensor
<b>Video Frame Output Rate</b>	PAL: 25 fps (1280x960)/ NTSC:30 fps (1280x960)

### Software User Interface


<b>Data Display</b>	640 x 480 on screen/processing
<b>Visual Alarm</b>	User definable temperature scale and alarm trigger point
<b>Alarm Function</b>	Ignore Mode or Save Alarm Mode Sound/Visual//network alarm (saves images to hard drive and creates log file for easy retrieval and review)

### Network Function

<b>Supported Protocols</b>	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, UPnP, SNMP, FTP, 802.1x, QoS, HTTPS, IPv6, SIP/SRTP
----------------------------	---

\* Any image frequency above 9 Hz  
requires an export license.

### LCG300 System Illustration

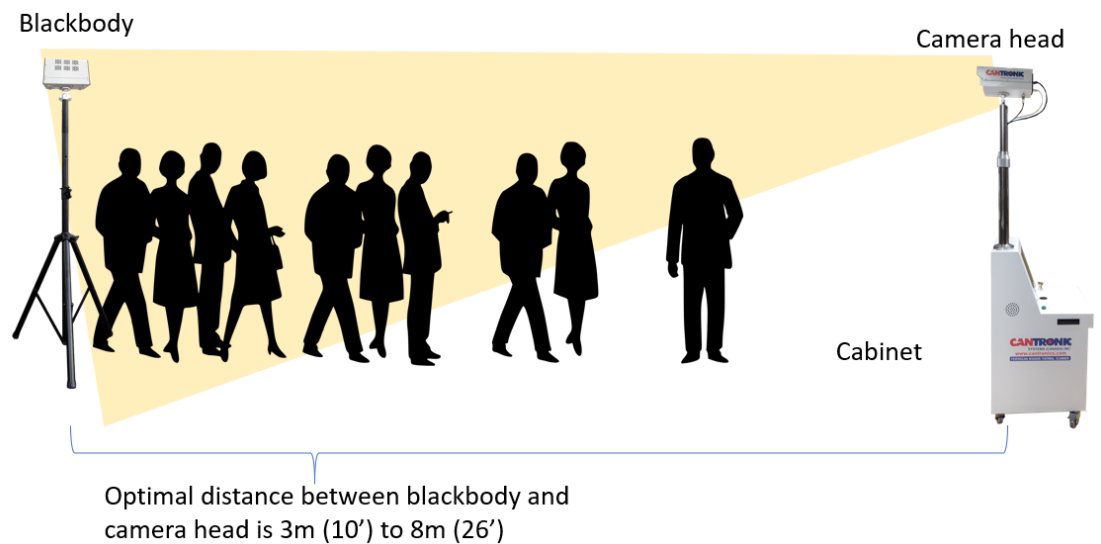

Specifications are subject to change without notice

©Cantronic Systems (Canada) Inc. DS-FSM-2020